


Floor-standing type air cooler

落地式顶出风冷风机

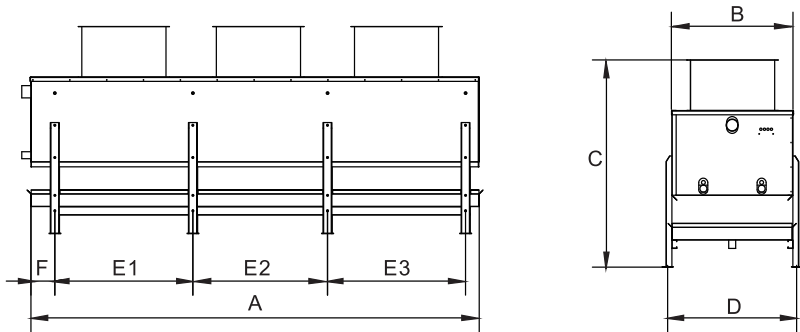

LLS落地式顶出风高温型冷风机技术参数 Technical data of LLS air cooler(high temperature) 片距 fin space: 4.5mm

型号 Model	制冷量 Cooling capacity	冷却面积 Heat exchange area	风机Fan						备注 Remark
			数量 Number	直径Φ Diameter	风量 Air flow	射程 Shot range	电压 Voltage	功率 Power	
	kW	m²	N	mm	m³h		v	W	
LLS-53/260	53	260	2	600	2*10000	20	380	2 × 1500	提供电 化霜型 式和非 标设计
LLS-67/330	67	330	3	600	3*10000	20	380	3 × 1500	
LLS-83/410	83	410	3	600	3*10000	20	380	3 × 1500	
LLS-94/470	94	470	3	700	3*14000	20	380	3 × 2200	
LLS-116/580	116	580	3	700	3*14000	20	380	3 × 2200	

LDS落地式顶出风中温型冷风机技术参数 Technical data of LDS air cooler(medium temperature) 片距 fin space: 6.0mm

型号 Model	制冷量 Cooling capacity	冷却面积 Heat exchange area	风机Fan						备注 Remark
			数量 Number	直径Φ Diameter	风量 Air flow	射程 Shot range	电压 Voltage	功率 Power	
	kW	m²	N	mm	m³h		v	W	
LDS-37/200	37	200	2	600	2*10000	20	380	2 × 1500	提供电 化霜型 式和非 标设计
LDS-47/250	47	250	3	600	3*10000	20	380	3 × 1500	
LDS-57-310	57	310	3	600	3*10000	20	380	3 × 1500	
LDS-67/360	67	360	3	700	3*14000	20	380	3 × 2200	
LDS-81/440	81	440	3	700	3*14000	20	380	3 × 2200	

LJS落地式顶出风低温型冷风机技术参数 Technical data of LJS air cooler (low temperature) 片距 fin space: 9.0mm


型号 Model	制冷量 Cooling capacity	冷却面积 Heat exchange area	风机Fan						备注 Remark
			数量 Number	直径Φ Diameter	风量 Air flow	射程 Shot range	电压 Voltage	功率 Power	
	kW	m²	N	mm	m³h		v	W	
LJS-24/140	24	140	2	600	2*10000	20	380	2 × 1500	提供电 化霜型 式和非 标设计
LJS-29/170	29	170	3	600	3*10000	20	380	3 × 1500	
LJS-36/210	36	210	3	600	3*10000	20	380	3 × 1500	
LJS-41/250	41	250	3	700	3*14000	20	380	3 × 2200	
LJS-52/300	52	300	3	700	3*14000	20	380	3 × 2200	

落地式顶出风冷风机外形尺寸及安装尺寸 Installation dimension

型号 Model	长L A	宽W B	高H C	安装尺寸 Installation dimension				进出管直径(mm) Pipe diameter(mm)		排水管径(英寸) Drainage pipe(inch)	冲霜水管(英寸) Defrost water pipe(inch)
				D	E1	E2	E3	进口inlet	出口outlet		
LLS-53/260 LDS-37/200 LJS-24/140	2220	870	1620	950	975	/	/	Φ 25	Φ 50	4"	2"
LLS-67/300 LDS-47/250 LJS-29/170	2720	870	1620	950	825	800	825	Φ 25	Φ 50	4"	2"
LJS-83/410 LDS-57/310 LJS-36/210	3200	870	1620	950	985	960	985	Φ 25	Φ 50	4"	2"
LLS-94/470 LDS-67/360 LJS-41/250	3200	975	1620	1055	985	960	985	2-Φ 25	2-Φ 50	4"	2"
LLS-116/580 LDS-81/440 LJS-52/300	3520	1080	1620	1160	1090	1070	1090	2-Φ 25	2-Φ 50	4"	2.5"

Technical data of dual discharge air cooler

双侧风冷风机技术参数

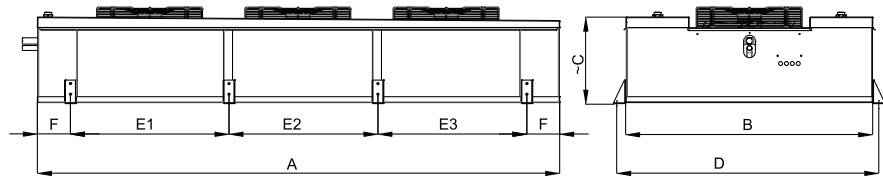

型号 Model	制冷量 Cooling capacity	冷却面积 Heat exchange area	风机Fan					进出管 Connection pipe	
			数量 Number	功率 Power	风量 Air flow	直径Φ Diameter	电压 Voltage	进管 Inlet	出管 Outlet
	kW	m²	N	W	m³h	mm	v	mm	mm
DLE-3.8/22	3.8	22	1	230	4000	400	380/220	16	25
DLE-5.8/30	5.8	30	2	2*180	2*2700	350	380/220	16	25
DLE-7.8/40	7.8	40	2	2*180	2*2700	350	380/220	16	25
DLE-12/60	12	60	2	2*230	2*4000	400	380/220	16	25
DLE-16/80	16	80	2	2*280	2*4700	450	380/220	19	35
DLE21/105	21	105	2	2*280	2*4700	450	380/220	19	35
DLE25/125	25	125	3	3*280	3*4700	450	380/220	19	35
DLE32/160	32	160	3	3*280	3*4700	450	380/220	19	35
DLE37/185	37	185	4	4*280	4*4700	450	380/220	25	42
DLE42/210	42	210	4	4*280	4*4700	450	380/220	25	42

双侧风冷风机外形尺寸及安装尺寸 Dimension of dual discharge air cooler

型号 Model	安装尺寸 Mounting dimensions							
	A(mm)	B(mm)	C(mm)	D(mm)	E1(mm)	E2(mm)	E3(mm)	F(mm)
DLE22m²	980	880	270	945	700			140
DLE30m²	1510	850	270	915	1230			140
DLE40m²	1510	850	270	915	1230			140
DLE60m²	1510	1050	370	1115	1230			140
DLE80m²	1510	1050	370	1115	1230			140
DLE105m²	1920	1050	370	1115	1640			140
DLE125m²	2220	1050	370	1115	674	633	633	140
DLE160m²	2720	1050	370	1115	840	800	800	140
DLE185m²	3120	1050	370	1115	1440	1400		140
DLE210m²	3520	1050	370	1115	1640	1600		140